

Model No. DS 0616

LED type	Chip
Pitch (HxV)	2.1mm x 2.2mm
Display Area	Φ 0.65M x 1.6M
In Cylindrical(DxH)	3.25 m ² / 34.98 ft ²
Total Area	1.0M x 1.6M x2 / 3.28ft x 5.25ft x2
Screen Size (HxV) x Screens	960 x 720 x1 (Full Wrap)
Resolution (HxV) x Pictures	480 x 720 x2


Luminance	> 650 cd/m ²
Luminous Uniformity	+3.0%
Brightness Control Level	None
Color Depth	16.7 million
Contrast	> 5000 : 1
Color Spectrum	R:630nm G:525nm B:470nm

Physical Dimension (DxH) Φ 0.83M x 2.23M / 2.72ft x 7.32ft

Physical Weight	350kg / 772 lbs
Ceiling Mount model available	None
Stand Option	None
Light Box Option	None
Light Box (Poster Size WxHxPcs)	None
Operation Temperature	0°C ~ +30°C
Storage Temperature	-20°C ~ +85°C

Refresh Rate	40Hz
Rotational Speed	400 RPM
Power Requirement(Peak)	AC200~240V, 18A, Single Phase

Power Consumption(Typical)	1850 Watt
Video Interface	DVI(1024 x 768@60Hz)
Media Integration	IPC (Composite, S-Video included)
IPC Type	Built-in IPC
Built-in Speaker	2 Channels(w/ Amp. 10Watt)
Built-in Optics Fiber Rx	Option
Optional Image Scaler Type	Built-in ISC

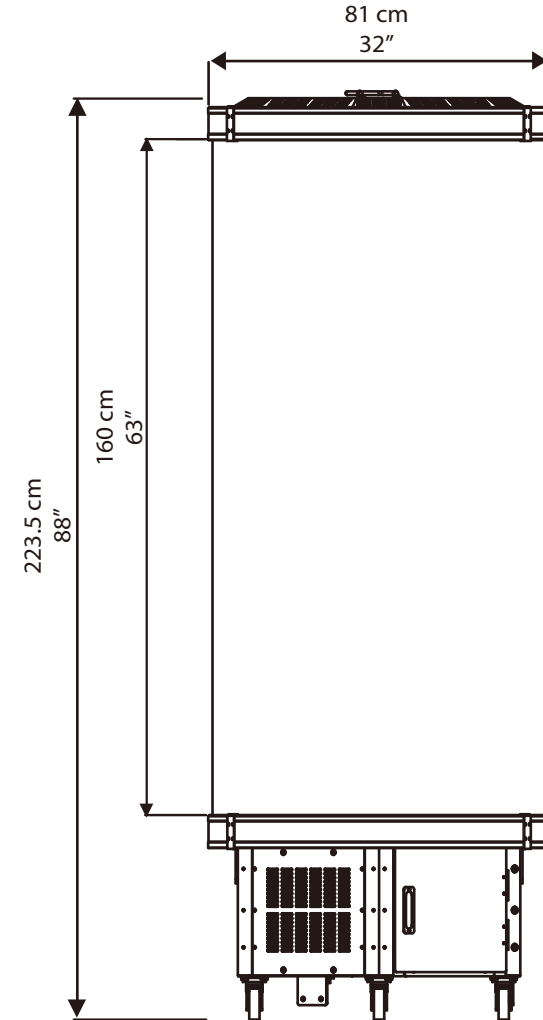

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE