

Model No. DS 0706


LED type	Lamp
Pitch (HxV)	2.0mm x 2.0mm
Display Area	
In Cylindrical(DxH)	Φ0.70M x 0.61M / 2.3ft x 1.97ft
Total Area	1.33 m ² / 14.29 ft ²
Screen Size (HxV) x Screens	1.09M x 0.61M x2 / 3.58ft x 1.97ft x2
Resolution (HxV) x Pictures	1092 x 304 x1 (Full Wrap) 546 x 304 x2

Luminance	> 5000 cd/m ²
Luminous Uniformity	+3.0%
Brightness Control Level	2
Color Depth	16.7 million
Contrast	> 5000 : 1

Physical Dimension (DxH)	Φ 0.82M x 2.74M / 2.69ft x 8.99ft Φ 0.82M x 2.03M / 2.69ft x 6.66ft(B Type)
Physical Weight	470Kg/ 350kg(B Type) 1036 lbs/ 772 lbs(B Type)
Ceiling Mount model available	None
Stand Option	None
Light Box Option	Yes
Light Box (Poster Size WxHxPcs)	1.20M x 1.26M x2 / 3.94ft x 4.13ft x2
Operation Temperature	-20°C ~ +40°C
Storage Temperature	-20°C ~ +85°C

Refresh Rate	90Hz
Rotational Speed	450 RPM
Power Requirement(Peak)	Either one option 1.AC 100~120, 50A Single Phase 2.AC 200~240, 25A Single Phase

Power Consumption(Typical)	3250 / 2900Watt(B Type)
Video Interface	DVI(1280 x 1024@60Hz)
Media Integration	IPC (Composite, S-Video included)
IPC Type	Built-in IPC
Built-in Speaker	2 Channels(w/ Amp. 10Watt)
Built-in Optics Fiber Rx	Option
Optional Image Scaler Type	Built-in ISC

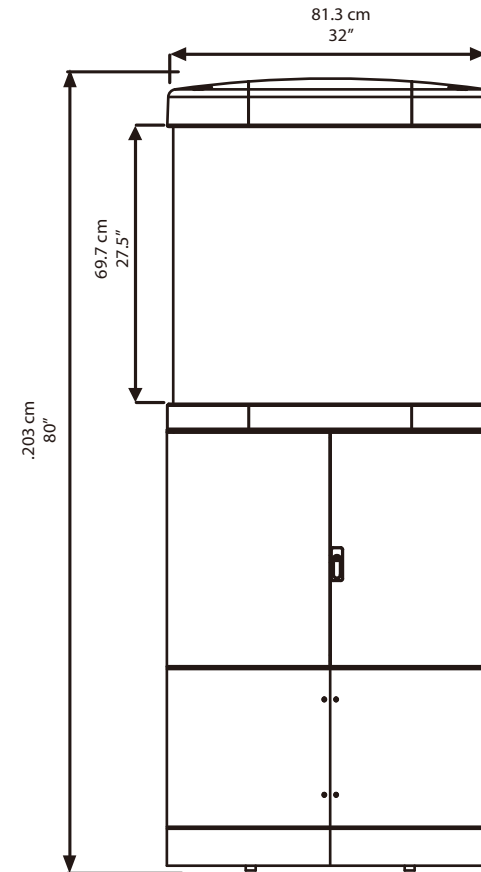

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE