

Model No. DS 3522

LED type	Lamp
Pitch (HxV)	4.0mm x 4.0mm
Display Area	
In Cylindrical(DxH)	Φ 3.50M x 2.16M / 11.43ft x 6.72ft
Total Area	23.64 m ² / 241.32 ft ²
Screen Size (HxV) x Screens	3.65M x 2.16M x3 / 11.97ft x 6.72ft x3
Resolution (HxV) x Pictures	912 x 540 x3


Luminance	Typ. 7500 cd/m ²
Luminous Uniformity	+3.0%
Brightness Control Level	2
Color Depth	16.7 million
Contrast	> 5000 : 1

Physical Dimension (DxH)	Φ 4.22M x 4.35M / 13.85ft x 14.27ft
---------------------------------	-------------------------------------

Physical Weight	3500kg / 7709 lbs
Ceiling Mount model available	None
Stand Option	None
Light Box Option	None
Light Box (Poster Size WxHxPcs)	None
Operation Temperature	-20°C ~ +40°C
Storage Temperature	-20°C ~ +85°C

Refresh Rate	120Hz
Rotational Speed	100 RPM
Power Requirement(Peak)	Either one option 1.AC200~240V, 145A, 3 Phase, 3wires 2.AC380~420V, 85A, 3 Phase, 4wires

Power Consumption(Typical)	33800 Watt
Video Interface	DVI(1024 x 768@60Hz)
Media Integration	IPC (Composite, S-Video included)
IPC Type	Standalone IPC
Built-in Speaker	None
Built-in Optics Fiber Rx	Standard
Optional Image Scaler Type	Standalone ISC

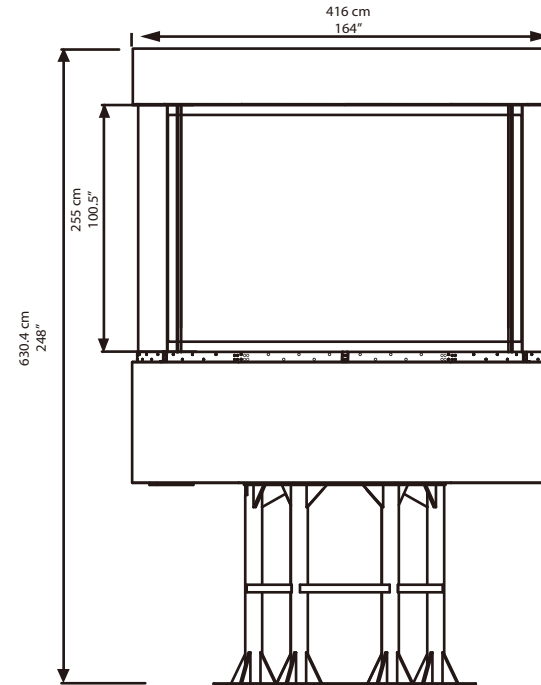

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE